



6.8 PANEL

Features and Benefits


Safety Standard Ratings:

- UL 580, Determines the Uplift Resistance of Roof Assemblies
- UL 2218, Determines Impact Resistance of Prepared Roof Covering Materials
- UL 790, Standard Test Methods for Fire Tests of Roof Coverings
- UL 263, Standard Test Methods for Fire Tests of Building Material
- 26 Ga - ASTM A792, SS or HSLA Grade 80 Class 1 or 2
- 24 Ga - ASTM A792, SS or HSLA Grade 50 Class 1



Product Specifications

- Applications:** Roof and Wall, Typically ordered as "Reverse" rolled on walls
- Coverage Width:** 34"
- Rib Spacing:** 6.8" on center
- Rib Height:** 1 1/2"
- Minimum Slope:** 1/2 : 12
- Panel Attachment:** Exposed Fastening System
- Gauges:** 26(All Standard Colors), 24(Select Colors)
- Finishes:** Smooth
- Coatings:** Galvalume AZ55 with Resin
Rb3 Premium 40 Year Coil Coating System

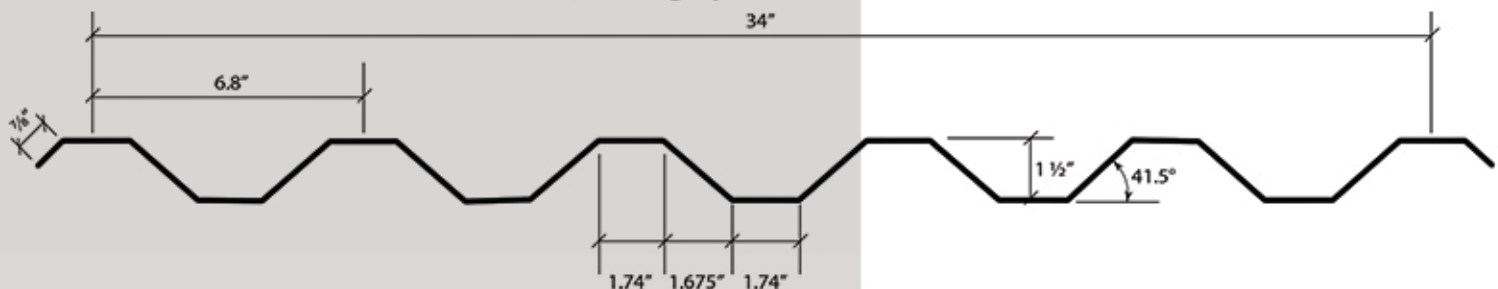

BUILDING A REPUTATION ON "OLD FASHIONED INTEGRITY"