



# C PANEL

## Features and Benefits

### Safety Standard Ratings:

UL 790, Standard Test Methods for Fire Tests of Roof Coverings

26 Ga - ASTM A792, SS or HSLA Grade 80 Class 1 or 2

24 Ga - ASTM A792, SS or HSLA Grade 50 Class 1



## Product Specifications

Applications: Roof and Wall

Coverage Width: 32" single lap

Rib Spacing: 2.667" on center

Rib Height: 7/8"

Minimum Slope: 3 : 12

Panel Attachment: Exposed Fastening System

Gauges: 26(All Standard Colors)


24(Selected Colors)

29(Optional)

Finishes: Smooth

Coatings: Galvalume AZ55 with Resin

Rb3 Premium 40 Year Coil Coating System

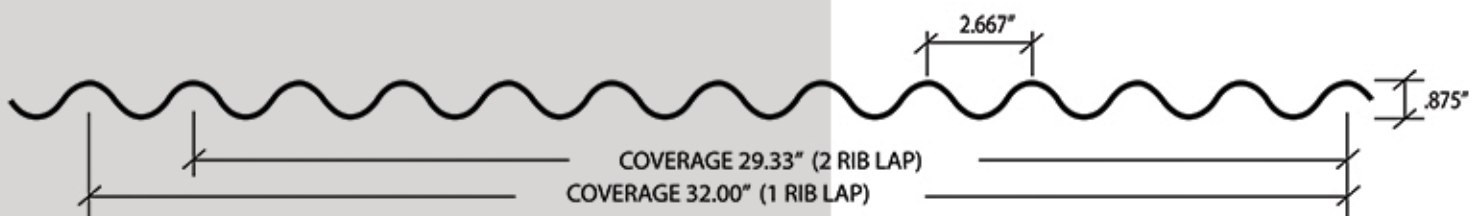

BUILDING A REPUTATION ON "OLD FASHIONED INTEGRITY"