



# PBR PANEL

## Features and Benefits


### Safety Standard Ratings:

- UL 580, Determines the Uplift Resistance of Roof Assemblies
- UL 2218, Determines Impact Resistance of Prepared Roof Covering Materials
- UL 790, Standard Test Methods for Fire Tests of Roof Coverings
- 26 Ga - ASTM A792, SS or HSLA Grade 80 Class 1 or 2
- 24 Ga - ASTM A792, SS or HSLA Grade 50 Class 1



## Product Specifications

- Applications: Roof and Wall
- Coverage Width: 36"
- Rib Spacing: 12" on center
- Rib Height: 1-1/4"
- Minimum Slope: 1/2 : 12
- Panel Attachment: Exposed Fastening System
- Gauges: 26(Standard), 24(Optional)
- Finishes: Smooth
- Coatings: Galvalume AZ55 with Resin  
Rb3 Premium 40 Year Coil Coating System

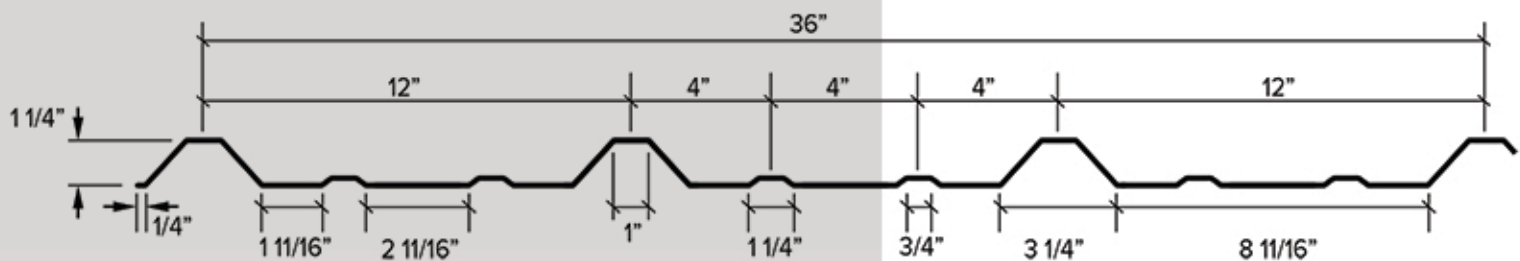

BUILDING A REPUTATION ON "OLD FASHIONED INTEGRITY"