

TS-324 PANEL

Features and Benefits

Safety Standard Ratings:

UL 580, Determines the Uplift Resistance of Roof Assemblies

UL 2218, Determines Impact Resistance of Prepared Roof Covering Materials

UL 790, Standard Test Methods for Fire Tests of Roof Coverings

ASTM A792, SS or HSLA Grade 50 Class 1





Product Specifications

Applications: Roof Coverage Width: 24"

Rib Height: 3"


Minimum Slope: 1/2:12

Panel Attachment: Concealed Fastening System

Gauges: 24 Finishes: Smooth

Coatings: Galvalume AZ55 with Resin

Rb3 Premium Coil Coating System

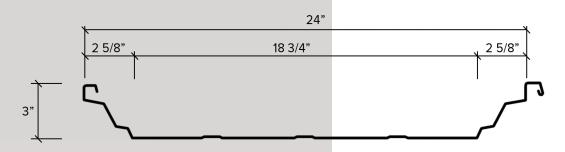

BUILDING A REPUTATION ON "OLD FASHIONED INTEGRITY"